




CP-K60DW-S THE PRINTER WITH 1 MEDIA FOR 2 PRINT SIZES

Mitsubishi Electric's new **CP-K60DW-S** is a compact and lightweight dye sublimation printer that requires minimal installation space and incorporates the latest developments for the generation of high resolution prints. Additionally users can now produce **two different print sizes from just one media.**

MAIN FEATURES

- 2 print sizes - 1 media
- Power saving
- Compact size
- High Resolution Prints
- Matte Finishing

FEATURES



MAIN FEATURES

• 2 print sizes - 1 media

The outstanding feature in the new CP-K60DW-S is the possibility to produce two print sizes from just one media paper saving time, reducing stock references and making maintenance and use easier.

• -96%* Standby power saved

CP-K60DW-S is designed to reduce power consumption in sleep mode by up to 96%. Standby power refers to the electric power consumed by electronic appliances while they are switched off or in a standby mode.

• Rewind Function

New Rewind Function has been included in order to optimize the 10x15cm (4x6") prints. When the last half part of the ribbon patch is not used in the last order it can be capable for next printing order of 10x15cm (4x6").

• High resolution

Mitsubishi Electric's printers incorporate the newly developed image processing methods making possible to reproduce smooth edges and natural images at 300DPI

• Matte finishing

A matte finish is a highly textured print finish, similar to that of a satin finish. It is much duller and does not reflect light. Many photographers prefer to produce matte finishes due to market demands.

• Compact size

CP-K60DW-S is convenient for professionals who require Mitsubishi Electric's high quality in a small and compact design which fits seamlessly into any installation space.

SPECIFICATIONS


Front panel

- 1 Paper strip bin
- 2 Alarm indicator
- 3 Paper ribbon indicator
- 4 Power indicator
- 5 Print outlet
- 6 Open button



Rear panel

- 1 Power switch
- 2 Power socket (AC line)
- 3 Fan cover Handle for transporting
- 4 USB terminal
- 5 Securing holes for the cable tie

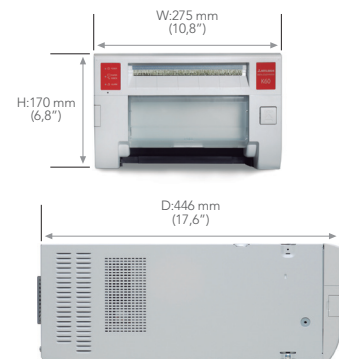

TECHNICAL SPECIFICATIONS

Print deck	Single-deck				
Printing Method	Dye Sublimation thermal transfer line 3-color face progressive printing (yellow, magenta, and cyan) and surface lamination				
Gradations	256 (8-bit) for each color				
Print resolution	300DPI				
Photo finishing	Matte/Glossy				
Media performance	Ref.	Print Size	Total prints	Prints x Roll	Print time
	CK-K76R	10x15cm (4x6") 15x20cm (6x8")*	640 320	320 x 2 160 x 2	11.4s 21.9s
		*Available 13x18cm (5x7") with white margin			
Interface	Hi-Speed USB Ver.2.0				
Memory size	64MB – Data transfer is possible during printing				
Dimensions (W / D / H)	275/446/170mm (10.8/17.6/6.7")				
Weight	12kg (26.5lb.)				
Power supply	220-240VAC, 50/60Hz. / 120VAC, 50/60Hz.				
Power consumption	2.4A (220-240VAC, 50/60Hz.) / 4.6A (120VAC, 50/60Hz.) / 0.05W (Standby mode)				
Accessories	Power cords (for 120 V and 230 V), Ink cassette (1), CD-ROM (1), Paper flange (1 set), Spacers (1 set), Quick setup guide (1), Paper strip bin (1), Cable tie (2), Securing band (1), Screw for securing band (1)				
Compatibilities	Easyphoto EVO / Kiosk gifts / Click / PC (new driver)				

Crane Distributors SA
 Telephone: +27 (0)11 803 8983
 Email: info@cranedistributors.co.za
 Website: www.mitsubishi-photo.co.za